


SPARK PLUGS.

By NGK

All spark plugs are created equal ! Not true, some plugs can improve performance, while others offer long life. Some make your lawnmower easier to start, while others resist fouling. Some cost a few rands while other cost a fortune. If you are just tuning your car to get rid of it then maybe it isn't cost effective to purchase the highest quality double platinum plugs. But if you are planning on keeping the car, Landy, outboard motor etc then the plug you choose can improve ease of starting, acceleration, fuel economy, as well as how soon you have to change them. In short, there are horsepower and mileage improvements available from different spark plugs.

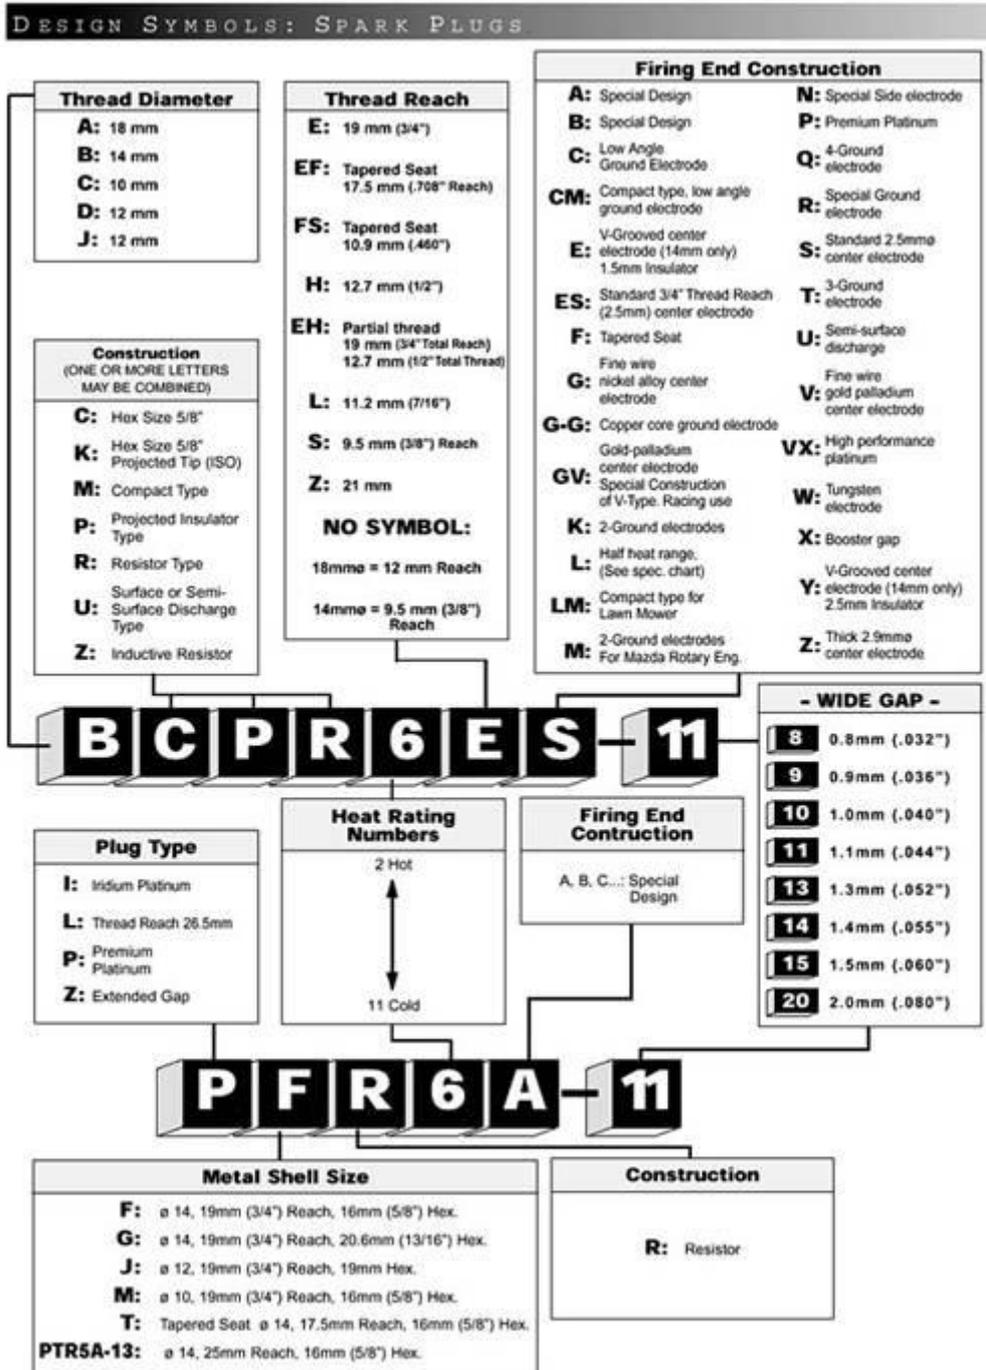


The **spark plug** is quite simple in theory: It forces electricity to arc across a gap, just like a bolt of lightning. The electricity must be at a very high voltage in order to travel across the gap and create a good spark. Voltage at the spark plug can be anywhere from 40,000 to 100,000 volts. The spark plug must have an insulated passageway for this high voltage to travel down to the electrode, where it can jump the gap and, from there, be conducted into the engine block and grounded. The plug also has to withstand the extreme heat and pressure inside the cylinder, and must be designed so that deposits from fuel additives do not build up on the plug. Spark plugs use a **ceramic insert** to isolate the high

voltage at the electrode, ensuring that the spark happens at the tip of the electrode and not anywhere else on the plug; this insert does double-duty by helping to burn off deposits. Ceramic is a fairly poor heat conductor, so the material gets quite hot during operation. This heat helps to burn off deposits from the electrode.

Some cars require a **hot plug**. This type of plug is designed with a ceramic insert that has a smaller contact area with the metal part of the plug. This reduces the heat transfer from the ceramic, making it run hotter and thus burn away more deposits.

Cold plugs are

designed with more contact area, so they run cooler. The carmaker will select the right temperature plug for each car. Some cars with high-performance engines naturally generate more heat, so they need colder plugs. If the spark plug gets too hot, it could ignite the fuel before the spark fires; so it is important to stick with the right type of plug for your car.

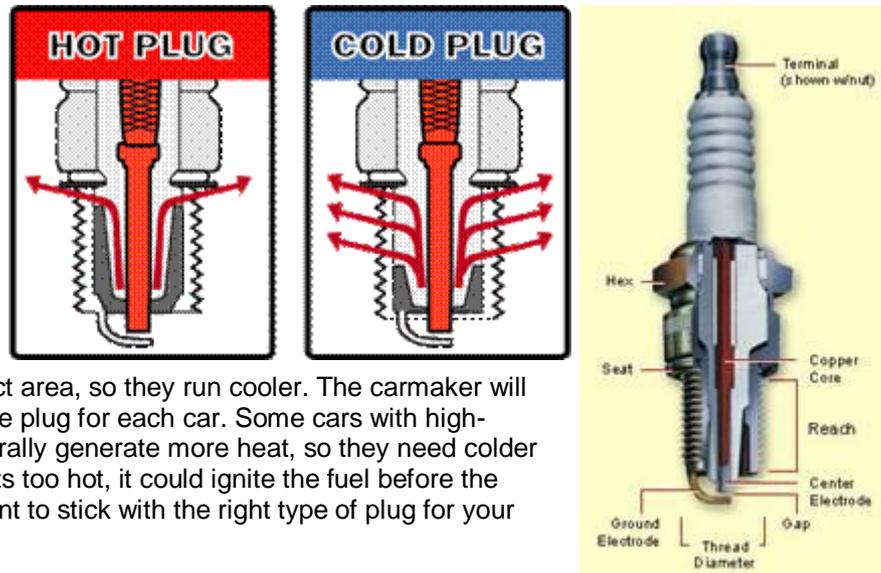

The difference between a "hot" and a "cold" spark plug is in the shape of the ceramic tip.

SPARK PLUG BASICS : Spark plugs are the "window" into your engine (your only eyewitness to the combustion chamber), and can be used as a valuable diagnostic tool. Like a patient's thermometer, the spark plug displays symptoms and conditions of the engine's performance. The experienced tuner can analyze these symptoms to track down the root cause of many problems, or to determine air/fuel ratios.

The spark plug has two primary functions:

1. To ignite the air/fuel mixture
2. To remove heat from the combustion chamber

Spark plugs transmit electrical energy that turns fuel into working energy. A sufficient amount of voltage must be supplied by the ignition system to cause it to spark across the spark plug's gap. This is called "Electrical Performance."

The temperature of the spark plug's firing end must be kept low enough to prevent pre-ignition, but high enough to prevent fouling. This is called "Thermal Performance", and is determined by the heat range selected.

It is important to remember that spark plugs **do not create heat**, they can only **remove** heat. The spark plug works as a **heat exchanger** by pulling unwanted thermal energy away from the combustion chamber, and transferring the heat to the engine's cooling system. The heat range is defined as a plug's ability to dissipate heat.

The rate of heat transfer is determined by:

The insulator nose length


Gas volume around the insulator nose

The materials/construction of the center electrode and porcelain insulator

A spark plug's heat range has no relationship to the actual voltage transferred through the spark plug. Rather, the heat range is a measure of the spark plug's ability to remove heat from the combustion chamber. The heat range measurement is determined by several factors; the length of the ceramic center insulator nose and its ability to absorb and transfer combustion heat, the material composition of the insulator and center electrode material.

Heat rating and heat flow path of NGK Spark Plugs

The insulator nose length is the distance from the firing tip of the insulator to the point where insulator meets the metal shell. Since the insulator tip is the hottest part of the spark plug, the tip temperature is a primary factor in pre-ignition and fouling.

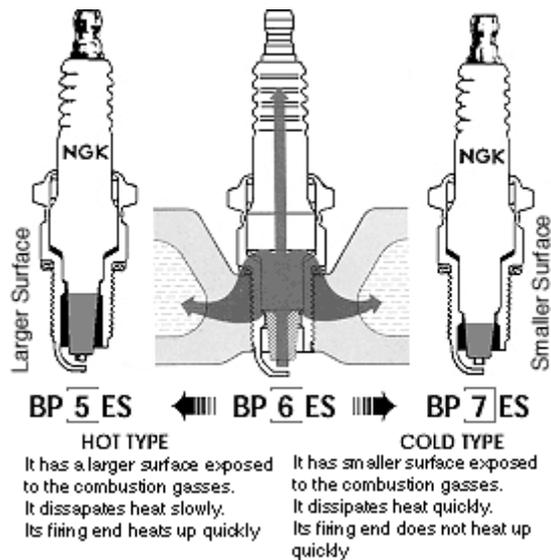

Whether the spark plugs are fitted in a lawnmower, boat, or a race car, the spark plug tip temperature must remain between 500°C-850°C. If the tip temperature is lower than 500°C, the insulator area surrounding the center electrode will not be hot enough to burn off carbon and combustion chamber deposits. These accumulated deposits can result in spark plug fouling leading to misfire. If the tip temperature is higher than 850°C the spark plug will overheat which may cause the ceramic around the center electrode to blister and the electrodes to melt. This may lead to pre-ignition/detonation and expensive engine damage. In identical spark plug types, the difference from one heat range to the next is the ability to remove approximately 70°C to 100°C from the combustion chamber. A projected style spark plug firing tip temperature is increased by 10°C to 20°C.

Heat range

The term spark plug heat range refers to the speed with which the plug can transfer heat from the combustion chamber to the engine head. Whether the plug is to be installed in a boat, lawnmower or racecar, it has been found the optimum combustion chamber temperature for gasoline engines is between 500°C-850°C. When it is within that range it is cool enough to avoid pre-ignition and plug tip overheating (which can cause engine damage), while still hot enough to burn off combustion deposits which cause fouling.

The spark plug can help maintain the optimum combustion chamber temperature. The primary method used to do this is by altering the internal length of the core nose, in addition, the alloy compositions in the electrodes can be changed. This means you may not be able to visually tell a difference between heat ranges. When a spark plug is referred to as a "cold plug", it is one that transfers heat rapidly from the firing tip into the engine head, which keeps the firing tip cooler. A "hot plug" has a much slower rate of heat transfer, which keeps the firing tip hotter.

An unaltered engine will run within the optimum operating range straight from the manufacturer, but if you make modifications such as a turbo, supercharger, increase compression, timing changes, use of alternate racing fuels, or sustained use of nitrous oxide, these can alter the plug tip temperature and may necessitate a colder plug. A rule of thumb is, **one heat range colder per modification** or one heat range colder for every 75-100hp you increase. In identical spark plug types, the difference from one full heat range to the next is the ability to remove 70°C to 100°C from the combustion chamber.

The heat range numbers used by spark plug manufacturers are not universal, by that we mean, a 10 heat range in Champion is not the same as a 10 heat range in NGK nor the same in Autolite. Some manufacturers numbering systems are opposite the other, for **Manufacturers** (Champion, Autolite, Splitfire), the **higher the number, the hotter the plug**. For **Japanese manufacturers (NGK,**


Denso), the higher the number, the colder the plug.

Do not make spark plug changes at the same time as another engine modification such as injection, carburetion or timing changes as in the event of poor results, it can lead to misleading and inaccurate conclusions (an exception would be when the alternate plugs came as part of a single precalibrated upgrade kit). **When making spark plug heat range changes, it is better to err on the side of too cold a plug.** The worst thing that can happen from too cold a plug is a fouled spark plug, **too hot a spark plug can cause severe engine damage.**

Tip Temperature and Firing End Appearance

√The firing end appearance also depends on the spark plug tip temperature. There are three basic diagnostic criteria for spark plugs: good, fouled and overheated. The borderline between the fouling and optimum operating regions (500°C) is called the spark plug self-cleaning temperature. The temperature at this point is where the accumulated carbon and combustion deposits are burned off.

Bearing in mind that the insulator nose length is a determining factor in the heat range of a spark plug, the longer the insulator nose, the less heat is absorbed, and the further the heat must travel into the cylinder head water journals. This means the plug has a higher internal temperature, and is said to be a hot plug. A hot spark plug maintains a higher internal operating temperature to burn off oil and carbon deposits, and has no relationship to spark quality or intensity.

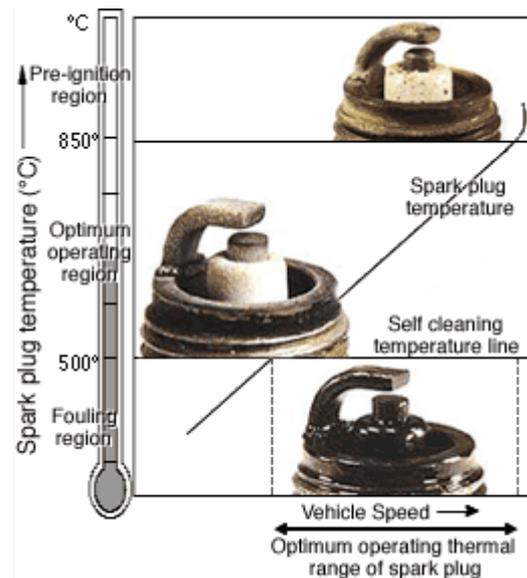

Conversely, a cold spark plug has a shorter insulator nose and absorbs more combustion chamber heat. This heat travels a shorter distance, and allows the plug to operate at a lower internal temperature. A colder heat range is necessary when the engine is modified for performance, subjected to heavy loads, or is run at high rpms for a significant period of time. The colder type removes heat more quickly, and will reduce the chance of pre-ignition/detonation and melting or damage to the firing end. (Engine temperature can affect the spark plug's operating temperature, but not the spark plugs heat range).

Below is a list of some of the possible external influences on a spark plug's operating temperatures. The following symptoms or conditions may have an effect on the actual temperature of the spark plug. The spark plug cannot create these conditions, but it must be able to cope with the levels of heat...if not, the performance will suffer and engine damage can occur.

Air/Fuel Mixtures seriously affect engine performance and spark plug operating temperatures.

- Rich air/fuel mixtures cause tip temperature to drop, causing fouling and poor drive ability
- Lean air/fuel mixtures cause plug tip and cylinder temperature to increase, resulting in pre-ignition, detonation, and possibly serious spark plug and engine damage
- It is important to read spark plugs many times during the tuning process to achieve the optimum air/ fuel mixture

Higher Compression Ratios/Forced Induction will elevate spark plug tip and in-cylinder temperatures

- Compression can be increased by performing any one of the following modifications:
a) reducing combustion chamber volume (i.e.: domed pistons, smaller chamber heads, milling heads, etc.)

b) adding forced induction (Nitrous, Turbo charging or Supercharging)

c) camshaft change

- As compression increases, a colder heat range plug, higher fuel octane, and careful attention to ignition timing and air/fuel ratios are necessary. Failure to select a colder spark plug can lead to spark plug/engine damage

Advancing Ignition Timing

- Advancing ignition timing by 10° causes tip temperature to increase by approx. 70°-100° C

Engine Speed and Load

- Increases in firing-end temperature are proportional to engine speed and load. When traveling at a consistent high rate of speed, or carrying/pushing very heavy loads, a colder heat range spark plug should be installed

Ambient Air Temperature

- As air temperature falls, air density/air volume becomes greater, resulting in leaner air/fuel mixtures.
- This creates higher cylinder pressures/temperatures and causes an increase in the spark plug's tip temperature. So, fuel delivery should be increased.
- As temperature increases, air density decreases, as does intake volume, and fuel delivery should be decreased

Humidity

- As humidity increases, air intake volume decreases
- Result is lower combustion pressures and temperatures, causing a decrease in the spark plug's temperature and a reduction in available power.
- Air/fuel mixture should be leaner, depending upon ambient temperature.

Barometric Pressure/Altitude

- Also affects the spark plug's tip temperature. The higher the altitude, the lower cylinder pressure becomes. As the cylinder temperature de-creases, so does the plug tip temperature
- Many mechanics attempt to "chase" tuning by changing spark plug heat ranges
- The real answer is to adjust jetting or air/fuel mixtures in an effort to put more air back into the engine

Types of Abnormal Combustion

Pre-ignition

- Defined as: ignition of the air/fuel mixture before the pre-set ignition timing mark

Caused by hot spots in the combustion chamber...can be caused (or amplified) by over advanced timing, too hot a spark plug, low octane fuel, lean air/fuel mixture, too high compression, or insufficient engine cooling. A change to a higher-octane fuel, a colder plug, richer fuel mixture, or lower compression may be in order . You may also need to retard ignition timing, and check vehicle's cooling system. Pre-ignition usually leads to detonation; pre-ignition and detonation are two separate events

Detonation

The spark plug's worst enemy! (Besides fouling). Can break insulators or break off ground electrodes. Pre-ignition most often leads to detonation

Plug tip temperatures can spike to over 3000°F during the combustion process (in a racing engine)

Most frequently caused by hot spots in the combustion chamber.

Hot spots will allow the air/fuel mixture to pre-ignite. As the piston is being forced upward by mechanical action of the connecting rod, the pre-ignited explosion will try to force the piston downward. If the piston can't go up (because of the force of the premature explosion) and it can't go down (because of the upward motion of the connecting rod), the piston will rattle from side to side. The resulting shock wave causes an audible pinging sound. This is detonation.

Most of the damage than an engine sustains when "detonating" is from excessive heat

The spark plug is damaged by both the elevated temperatures and the accompanying shock wave, or concussion

Misfires

A spark plug is said to have misfired when enough voltage has not been delivered to light off all fuel present in the combustion chamber at the proper moment of the power stroke (a few degrees before top dead center)

A spark plug can deliver a weak spark (or no spark at all) for a variety of reasons...defective coil, too much compression with incorrect plug gap, dry fouled or wet fouled spark plugs, insufficient ignition timing, etc.

Slight misfires can cause a loss of performance for obvious reasons (if fuel is not lit, no energy is being created)

Severe misfires will cause poor fuel economy, poor drive ability, and can lead to engine damage

Fouling

- Will occur when spark plug tip temperature is insufficient to burn off carbon, fuel, oil or other deposits
- Will cause spark to leach to metal shell...no spark across plug gap will cause a misfire
- Wet-fouled spark plugs must be changed...spark plugs will not fire
- Dry-fouled spark plugs can sometimes be cleaned by bringing engine up to operating temperature
- Before changing fouled spark plugs, be sure to eliminate root cause of fouling